

**General Product Information:**

ROXUL® products are mineral wool fibre insulations made from basalt rock and slag. This combination results in a non-combustible product with a melting point of approximately 2150°F (1177°C), which gives it excellent fire resistance properties. ROXUL mineral wool is a water repellent yet vapour permeable material.

**Description & Common Applications:**

The RockBoard™35 product is a semi-rigid mineral wool insulation board that is non-combustible, lightweight, water repellent, fire resistant and sound absorbent. This product is a general all purpose board with low thermal conductivity. This board can also be fabricated to different dimensions while still retaining fire, water and thermal properties.

**Compliance and Performance:**

ASTM C 612 Mineral Fiber Block and Board Thermal Insulation Type IVA, Complies

**Fire Performance:**

ASTM E 136	Behaviour of Materials at 750°C (1382°F)	Non-Combustible
CAN4 S114	Test for Non-Combustibility	Non-Combustible
ASTM E 84(UL 723)	Surface Burning Characteristics	Flame Spread = 5
		Smoke Developed = 5
CAN/ULC S102	Surface Burning Characteristics	Flame Spread = 5
		Smoke Developed = 10

**Maximum Service Temperature:**

ASTM C 411 Hot Surface Performance In Compliance with  
ASTM C612 @ 1200°F(650°C)

**Dimensional Stability:**

ASTM C 356 Linear Shrinkage 0.35% @ 1200°F (650°C)

**Moisture Resistance:**

ASTM C 1104 Moisture Sorption 0.3%

**Fungi Resistance**

ASTM C1338 Determination of Fungi Resistance Passed



**Thermal Resistance:**

ASTM C 518 (C 177) R-value/inch @ 75°F 4.1 hr.ft².F/Btu  
RSI value/25.4 mm @ 24°C 0.72 m²K/W

**Corrosive Resistance:**

ASTM C 665 Corrosiveness to Steel  
ASTM C 795 \*\*\*\* Stainless Steel Stress Corrosion Specification as per Test  
Methods C871 and C692: U.S. Nuclear Regulatory Commission,  
Reg. Guide #1.36: U.S. Military Specifications MIL-I-24244 (all  
versions including B and C)

**Thermal Conductivity (k):**

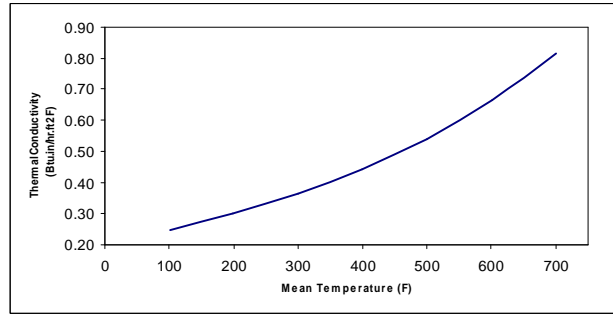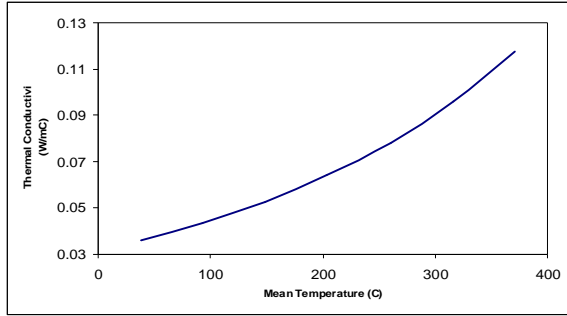

**Acoustical Performance**

**ASTM C423  
CO-EFFICIENTS AT FREQUENCIES**

Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1.0"	0.08	0.23	0.66	0.93	1.02	1.02	0.71
1.5"	0.15	0.47	0.98	1.06	1.02	1.02	0.90
2.0"	0.26	0.68	1.14	1.13	1.06	1.07	1.00
3.0"	0.62	1.03	1.20	1.10	1.08	1.10	1.10
4.0"	1.07	1.01	1.07	1.06	1.07	1.06	1.05

**Compressive Strength:**

ASTM C 165            at 10%            71 psf (3.4 kPa)  
                                 at 25%            209 psf (10 kPa)

**Density:**

ASTM C 612-00 – Actual      3.5 lbs/ft<sup>3</sup>      56 kg/m<sup>3</sup>

**Dimensions:**

24" (width) x 48" (length)  
610 mm (width) x 1219 mm (length)

36" (width) x 48" (length)  
914 mm (width) x 1219 mm (length)

**Thickness:**

Product thickness is available in 1" to 4" in ½" increments.

**Key Application Qualifiers:**

- Easily cut
- Non-combustible
- Excellent sound absorbency
- Chemically inert
- Does not rot or sustain vermin
- Does not promote growth of fungi or mildew
- Low moisture sorption
- Water resistant
- CFC and HCFC free product and process
- Made from natural & recycled materials

**Other ROXUL Products:**

Please consult ROXUL for all your insulation needs. We have an extensive range of products for all applications from pipe insulation to commercial products to residential batts. ROXUL invites all inquiries and will act promptly to service all of your requirements.

\*\*\* "Provisions for lot testing may be required, consult manufacturer."

**Note:**

As ROXUL Inc. has no control over installation design and workmanship, accessory materials or application conditions, ROXUL Inc. does not warranty the performance or results of any installation containing ROXUL Inc's. products. ROXUL Inc's. overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.

**ROXUL INC.**

**Milton, Ontario Tel: 905-878-8474  
Tel: 1-800-265-6878**

**Fax: 905-878-8077  
Fax: 1-800-991-0110**

Revised: August 7, 2007  
Supersedes: June 1, 2007